

C42500

CuSn3Zn9

CuSn2Zn10



Industrial Rolled

| Alloy Designation | |
|-------------------|---------------------------------|
| EN | CuNi3Zn9 CuSn2Zn10 CW454K |
| DIN CEN/TS 13388 | |
| NF | (UE39Z) |
| JIS | C4250 |
| UNS | C42500 |

High Performance Alloys



We have developed a wide range of high performance alloys with excellent properties regarding conductivity, strength, corrosion behaviour, bend ability and relaxation properties. KME alloys are the first choice materials for high-end applications and products.

| Chemical Composition | | |
|----------------------|-------------|---|
| Weight percentage | | |
| Cu | Rest | % |
| Sn | 1.5 .. 3.0 | % |
| Zn | 7.5 .. 10.0 | % |

Characteristics

CuSn3Zn9 has excellent cold forming properties, good conductivity combined with high strength and hardness. Corrosion resistance, especially against seawater and industrial atmosphere is good and stress corrosion cracking susceptibility is low. Spring properties are good, so it is used for applications like spring, connectors, contacts.

This alloy is in accordance with RoHS 2002/96/CE for electric & electronic equipments and 2002/53/CE for automotive industry.

Main Applications

Automotive Switches and Relays, Contacts, Connectors, Terminals
Electrical Switches and Relays, Contacts, Connectors, Terminals, Components for the electrical industry, Stamped parts,

| Preferred Applications | | | |
|------------------------|---------------------|-----------|---------------------------|
| Spring Contact | Switches and Relays | Connector | Current Carrying Capacity |
| xx | x | xx | x |

x = well suited xx = particularly well suited

| Physical Properties | | | |
|---|--------------|------|---------------------|
| Typical values in annealed temper at 20 °C | | | |
| Density | | 8.75 | g/cm ³ |
| Thermal expansion coefficient | 20 .. 100 °C | 18.3 | 10 ⁻⁶ /K |
| | 20 .. 300 °C | 18.5 | 10 ⁻⁶ /K |
| Specific heat capacity | | 0.38 | J/(g·K) |
| Thermal conductivity | | 120 | W/(m·K) |
| Electrical conductivity (1 MS/m = 1 m/(Ω mm ²)) | | 15 | MS/m |
| Electrical conductivity (IACS) | | 25 | % |
| Thermal coefficient of electrical resistance (0 .. 100 °C) | | 1.0 | 10 ⁻³ /K |
| Modulus of elasticity (1 GPa = 1 kN/mm ²) | cold formed | 110 | GPa |
| | annealed | 125 | GPa |

C42500

CuSn3Zn9

CuSn2Zn10




Industrial Rolled

Mechanical Properties (EN 1652)

| Temper | Tensile Strength | Yield Strength Minimum | Elongation Minimum | Hardness |
|-------------|------------------|------------------------|--------------------|------------|
| | Rm | Rp _{0.2} | A _{50mm} | HV * |
| | MPa | MPa | % | HV |
| R320 | 320 .. 380 | max. 230 | 25 | 80 .. 110 |
| R380 | 380 .. 430 | 200 * | 16 | 110 .. 140 |
| R430 | 430 .. 520 | 330 * | 6 | 140 .. 170 |
| R510 | 510 .. 600 | 430 * | 3 | 160 .. 190 |
| R580 | 580 .. 690 | 520 * | - | 180 .. 210 |
| R660 | > 650 | 610 * | - | > 200 |

*only for information

Electrical Conductivity

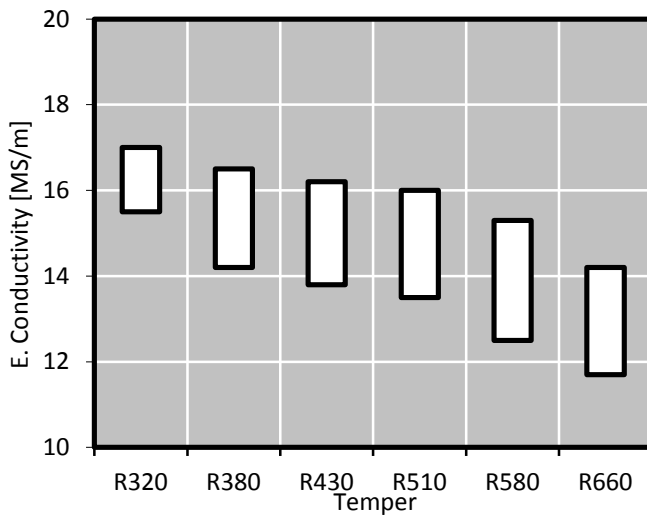

Electrical conductivity is strongly influenced by chemical composition. A high level of cold deformation and small grain size decrease the electrical conductivity moderately. Minimum conductivity level can be specified.

Fabrication Properties*

| | |
|--|-----------------------|
| Cold Forming Properties Max. 90% between annealings | Excellent |
| Hot Forming Properties at 790 .. 840°C | Less suitable |
| Machinability (Rating 30) | Less suitable |
| Electroplating Properties | Good |
| Hot Tinning Properties | Excellent |
| Soft Soldering, Brazing | Excellent |
| Resistance Welding | Less suitable |
| Gas Shielded Arc Welding | Excellent |
| Laser Welding | Excellent |
| Soft Annealing | 425.. 700°C, 1 .. 3h |
| Stress Relieving Annealing | 200 .. 300°C, 1 .. 3h |

Corrosion Resistance*

Resistant to:

Good resistance to atmospheric corrosion due to formation of a protective patina. Cu-OFE has a good resistance in natural and industrial atmosphere (maritime air too). Corrosion resistance, especially against seawater and industrial atmosphere is good and CuSn3Zn9 is resistant to industrial and drinking water, aqueous and alkaline solutions (not oxidizing), pure water vapour (steam), non oxidizing acids (without oxygen in solution) and salts, neutral saline solutions.

Stress corrosion cracking susceptibility is low.

Not resistant to:

Oxidising acids, solutions containing cyanides, ammonia or halogens, hydrous ammonia and halogenated gases, hydrogen sulfide.

* For more details call our technical service


* For more details call our technical service

C42500
CuSn3Zn9
CuSn2Zn10



Industrial Rolled

Bending Properties Thickness: ≤ 0.5 mm

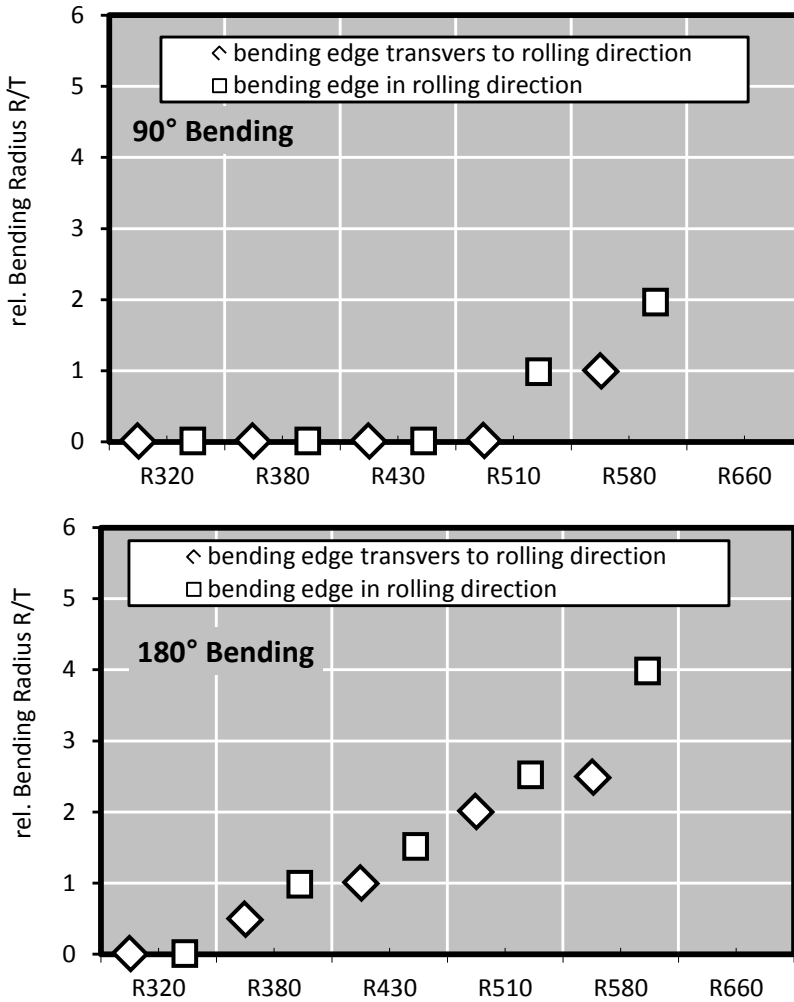


Bending test according to EN ISO 7438 is done with 10 mm wide samples. Smaller samples in general – as well as lower thickness – allow a lower bending radius without cracks. If needed we supply bending optimized temper classes that far exceed standard quality.

Please take care when comparing with ASTM E 290 results, there the bend definition direction is contradictory.

Bending Definition

Transverse = good way
 Parallel = bad way

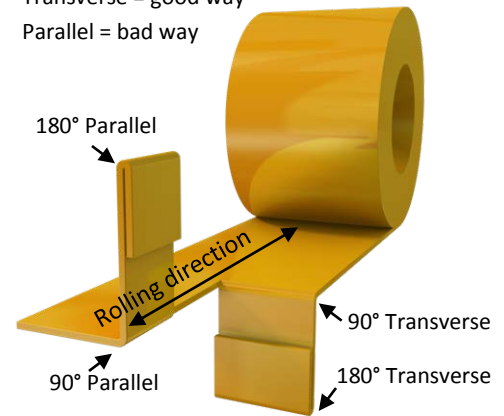

Minimum Bending Radius Calculation

To find out the minimum possible bending radius take the R/T value from the list.

Example: R/T = 0.5 and thickness 0.3 mm

$$\begin{aligned} \text{Minimum radius} &= (R/T) \times \text{thickness} \\ &= 0.5 \times 0.3 \text{ mm} = 0.15 \text{ mm} \end{aligned}$$

Bending Properties*


| Temper | Thickness Range | Bending 90° | | Bending 180° | |
|--------|-----------------|-------------|----------|--------------|----------|
| | | Trans-vers | Parallel | Trans-vers | Parallel |
| | mm | R/T | R/T | R/T | R/T |
| R320 | ≤ 0.5 | 0 | 0 | 0 | 0 |
| R380 | ≤ 0.5 | 0 | 0 | 1.5 | 1 |
| R430 | ≤ 0.5 | 0 | 0 | 1 | 1.5 |
| R510 | ≤ 0.5 | 0 | 1 | 2 | 2.5 |
| R580 | ≤ 0.5 | 1 | 2 | 2.5 | 4 |
| R660 | ≤ 0.5 | - | - | - | - |

* Measured at sample width 10 mm according to EN 1654


Possible bending radius = (R/T) x thickness



Softening Resistance

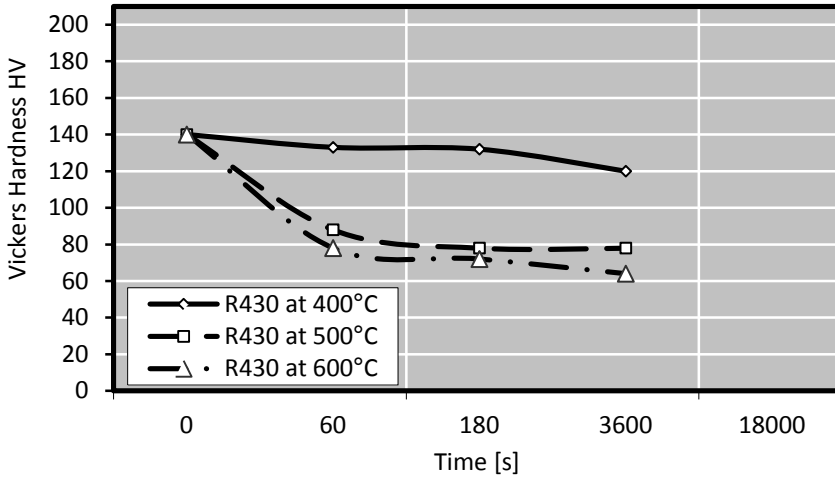

After short time heat treatment Vickers Hardness is measured. The diagram shows typical values.

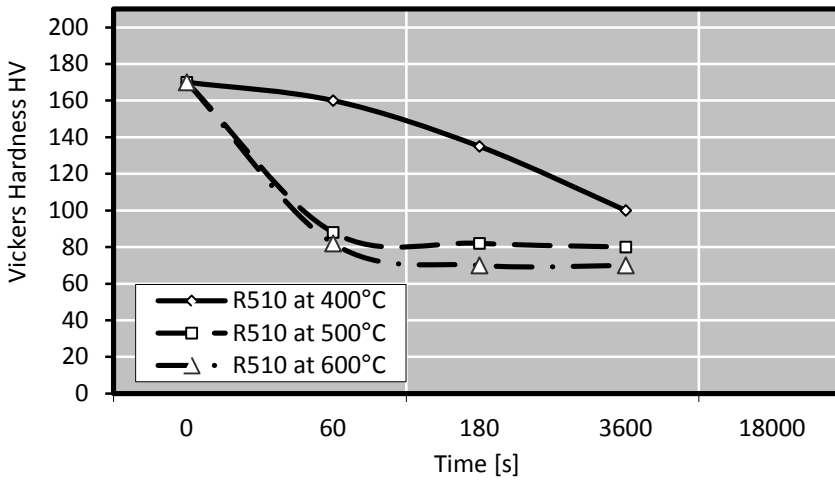


Bend Fatigue (at room temperature)

The fatigue strength gives an indication about the resistance to variations in applied tension. It is measured under symmetrical alternating load. The maximum bending load for 10^7 load cycles without crack is measured. Dependent on the temper class it is approximately 1/3 of the tensile strength R_m .



Relaxation Properties

Thermal stress relieved

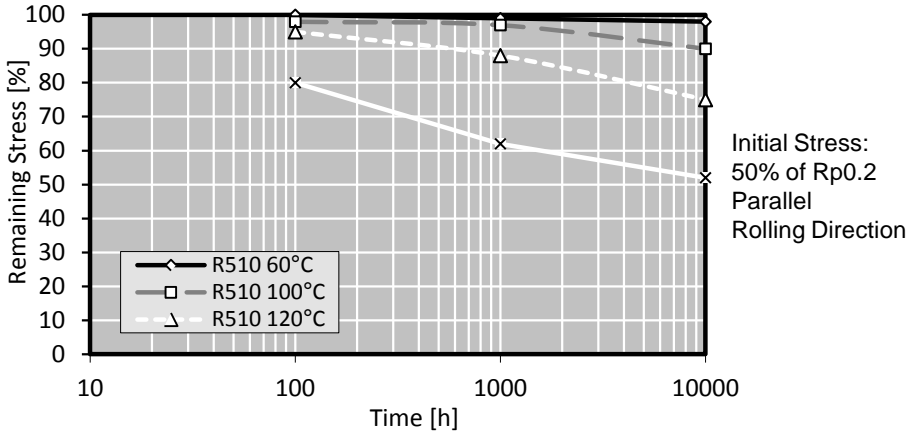

Stress relaxation is tested with cantilever bending test equipment. This method is taking short time relaxation into account, so that the values achieved are very realistic, while other test methods like tube test pretend better properties from the achieved values. Relaxation values give an indication about stress relieve of strip under tension for a certain time and temperature. As it is measured on plain strip, the behaviour of deformed parts may differ, nevertheless the ratio between the different tempers remains the same.

Typical test sample thickness is 0.3 – 0.6 mm.

Standards for copper and copper alloys

| | |
|----------|---|
| EN 1652 | Plate, sheet, strip and circles for general purposes |
| EN 1654 | Strip for springs and connectors |
| EN 1758 | Strip for lead frames |
| EN 13148 | Hot-dip tinned strip |
| EN 13599 | Copper plate, sheet and strip for electrical purposes |
| EN 14436 | Electrolytically tinned strip |